

AVAYA


MI30DP

INTERNAL RECORDER INTERFACE MODULE

USERS GUIDE

COMCODE: 407 935 642

PEC CODE: 8800-200

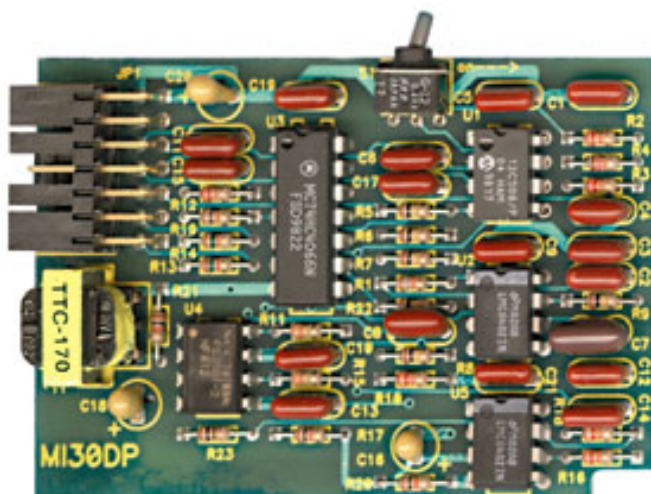

Description

The MI30DP recorder interface module provides audio of both sides of a conversation for recording purposes. The module is factory installed within the voice terminal.

Features

The MI30DP interface provides:

- 1] Record audio from the handset, speakerphone, or headset.
- 2] Optional beep tone signal.

Installation

The MI30DP is factory installed. The analog record audio has 2 outputs:

- 1] Pair 2 of the voice terminal's line jack. This is pin numbers 1 & 2 of the line jack, or the orange/white pair.
- 2] The mini-phone jack on the rear of the set. Use a patch cord with a mini-phone plug on one end, and the proper connector for your recorder on the other. An attenuating patch cord is *not* recommended.

Headset

To record from a headset, the user must program the lower right feature button for headset status (*782). Refer to "Code Programming" in Lucent's users guide for the MLX set, or check with your administrator if you are not familiar with programming feature buttons.

Options


Beep tone

The beep tone is set by a toggle switch. The switch is accessed through a hole on the back of the voice terminal. The default position for the beep tone option is "on".

To set the beep tone option, remove the desktop stand from the bottom of the voice terminal. Remove the single screw from the wall bracket and remove the wall bracket from the voice terminal. Locate the access hole as shown in the illustration, and set the beep tone as required.

POWER CONSUMPTION.....7.75mA @ 5vdc maximum

MLX-10DP REAR VIEW

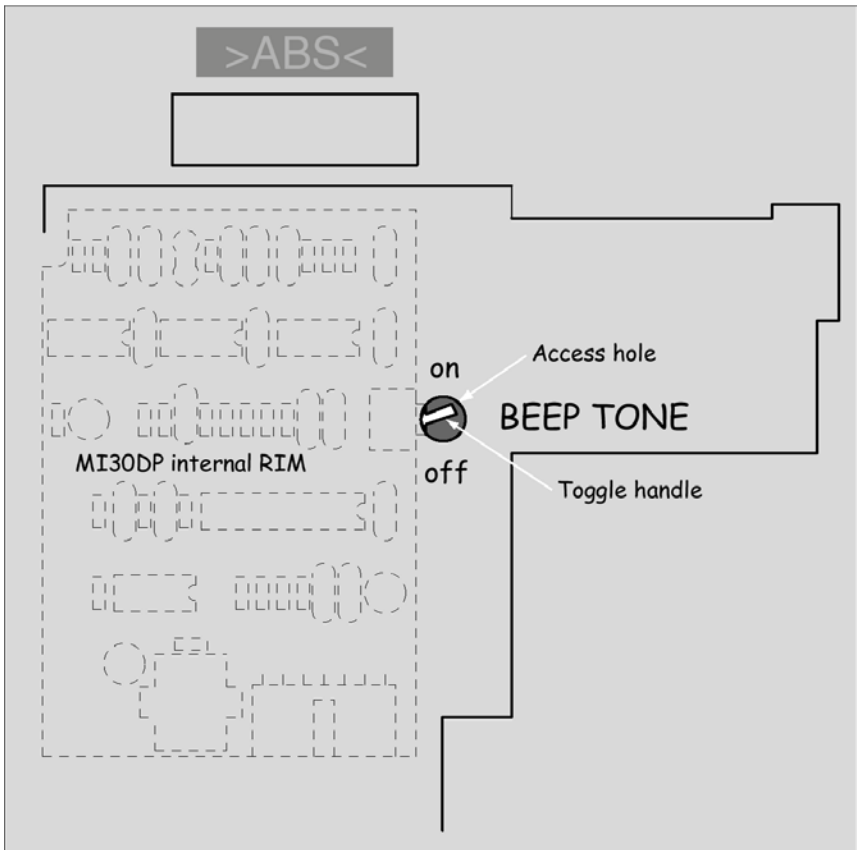

You can connect to a recorder direct from this jack, located on the rear of the set. MLX-10DP shown, other sets are similar.



Starcom Incorporated

3303 North Dixie Highway
Boca Raton, FL. 33431

phone: (561) 392-7001 ★ fax: (561) 392-7003 ★ email: info@starcom-inc.com ★ internet: www.starcom-inc.com