

AVAYA

106-AC

AUDIO COUPLER

USERS GUIDE

COMCODE: 407 715 507

PEC CODE: 8807-030




Description

The 106-AC audio coupler is installed between the control unit and a Partner telephone set.

The coupler provides a bidirectional audio path and a contact closure when the telephone is off hook. The audio path is connected only when the telephone is off hook.

Installation


Connect a D8W cord from J3 to the Partner control unit.
 Connect a D8W cord from J2 to the Partner telephone. The audio is available on J1 pair 1. The closure is available on J1

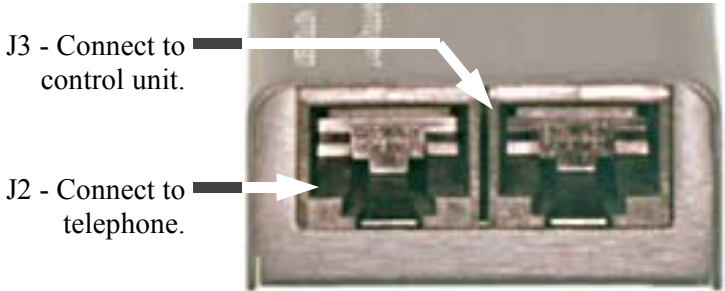

J3 - Connect to control unit.

J2 - Connect to telephone.

pair 2.

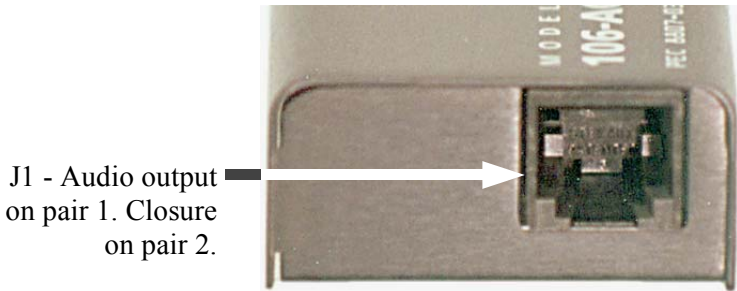

J1 - Audio output on pair 1. Closure on pair 2.

Specifications

INSERTION LOSS	0.5dB
CONTACTS	Solid state
Contact "ON" resistance	16 ohm
Contact load	100ma / 300v peak load

Accessories

1ea. MA16 Y-CABLE - 6ft length. RJ14 plug, pair 1 (audio) to mini-phone plug, pair 2 (contact closure) to submini-phone plug.



Starcom Incorporated

3303 North Dixie Highway
Boca Raton, FL. 33431

phone: (561) 392-7001 ★ fax: (561) 392-7003 ★ email: info@starcom-inc.com ★ internet: www.starcom-inc.com